




PN 311-011, Rev B Buzzer; PWM interface

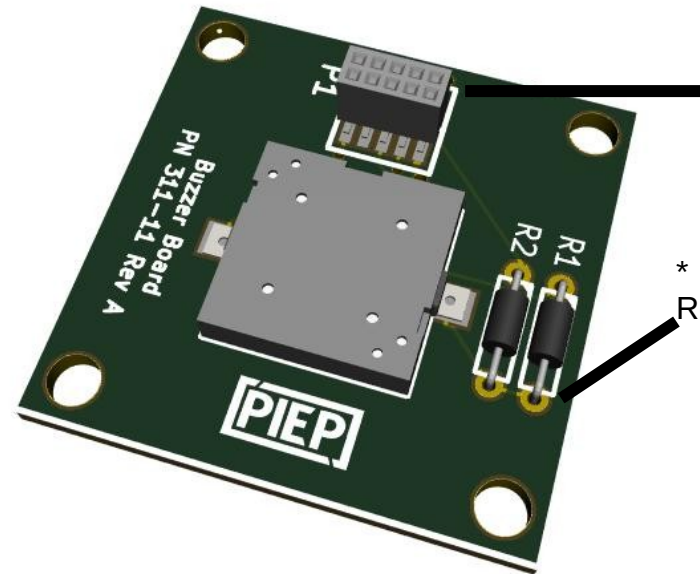

Stacking Headers

Top and Bottom Headers

1	5V / 3.3V		2
3			4
5	PWM*	PWM*	6
7			8
9	GND		10

* Remove R1 to control buzzer via SPIP-6 PWM
 Remove R2 to control buzzer via SPIP-5 PWM

STM-1341, pizeo buzzer can be powered from either 5V or 3.3V source.
 Max current draw 5 mA; max 75 dBA when operating at 5 V. Requires
 processor PWM output pin on either SPIP5 or SPIP6. Resonant frequency
 4.1 KHz
 Spare Standoffs – SKU 400-012

PIEP is a copyright of E3 Embedded Systems, LLC
 and is protected under US Patent 9,870,337



EMBEDDED SYSTEMS