




PN 311-007, Rev B Breakout Board

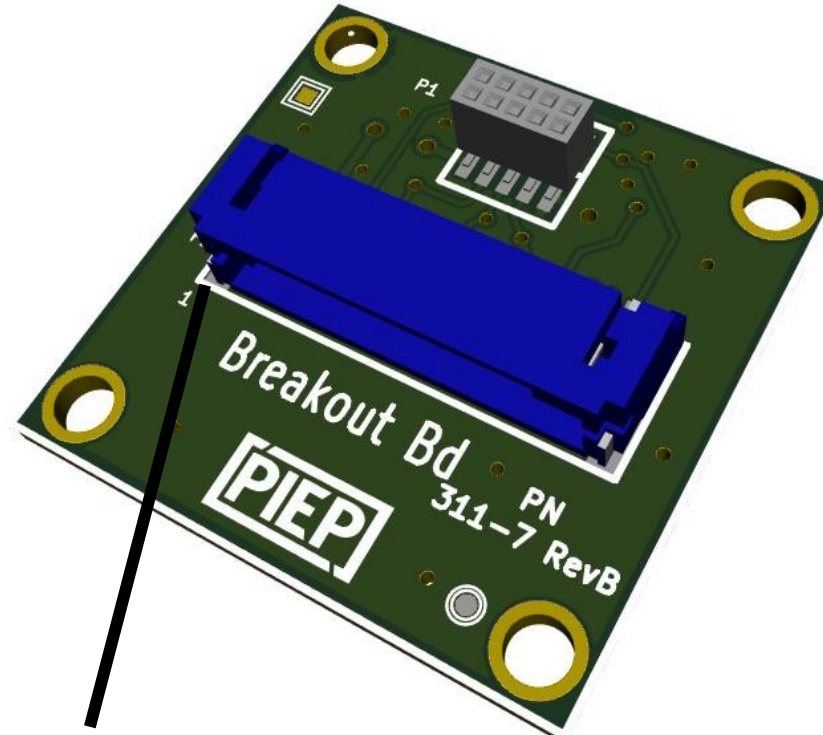

Stacking header pins are routed to P2 on a 1 to 1 basis (pin 1 on P1 maps to pin 1 on P2 header).

Mating P2 connector – SKU 400-07

Pre-crimped leads – SKU 400-009

Spare Standoffs – SKU 40-012

Remote Mount Kit – SKU 311-019

Breakout board contains no active components. When used in pairs with an interconnect cable (between associated P2 connectors), breakout boards can be used to remote mount peripherals. May also be used for monitoring or accessing signals in stacking connectors.

PIEP is a copyright of E3 Embedded Systems, LLC and is protected under US Patent 9,870,337

